



INSTALLATION INSTRUCTIONS

<u>Product</u> 7160-1882-XX DELL 7030 TABLET DOCKING STATION	<u>Revision</u> Rev A	<u>Form</u> INST-1141 Printing Spec: PS-001
---------------------------------------------------------------------------	---------------------------------	---------------------------------------------------------------------

This instruction sheet is for the Dell 7030 Tablet Docking Station. For instructions on features, set-up, and operation of the Dell 7030 Tablet, please refer to the manual provided by Dell with the Tablet.

This Docking Station is designed to be used with a variety of Gamber-Johnson mounting systems. Installation instructions for other Gamber-Johnson products are provided with each individual product.

This instruction sheet is for the following products:

- Item No. 7160-1882-00** Lite PCB (No HDMI)
- Item No. 7160-1882-10** Full PCB (With HDMI)

A Dell certified power adapter must be used to power the docking station, the below power adapter are sold separately unless ordered through a KIT.
(See Page 4 For Isolated Power Adapter Options)

7300-0468 - 11-16VDC Input - Available with the Docking Stations as a KIT: **7170-1053-00 (No HDMI)** or **7170-1053-10 (With HDMI)**



Product Mounting Disclaimer
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brake lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

© Copyright 2023 Gamber-Johnson, LLC

If you need assistance or have questions, call Gamber-Johnson at 1-800-456-6868

PRE-INSTALLATION RECOMMENDATIONS

Conduct a "Bench Test"

Gamber-Johnson strongly advises a "bench test" be conducted to verify all electronic and software issues are resolved prior to installation:

1. Make sure the computer is operational by itself.
2. Insert computer into the docking station and verify that the computer is operating in the dock.
3. Interconnect entire assembly and verify start-up of all components, including other equipment (printers, modems, scanners, etc.)

Gamber-Johnson recommends positioning of all mounts and equipment in the vehicle prior to the actual install to verify that mounting locations are safe and practical.

IMPORTANT SAFETY INFORMATION FOR INSTALLERS

Safety is dependent on the proper installation and servicing of this docking station. It is important to read and follow all instructions before installing this product.

To properly install a Gamber-Johnson docking station you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation and service of aftermarket vehicle equipment.

There are no adjustments required at any time of the electrical components within the docking station. **Opening the docking station will void the product warranty.**

During Installation:

DO NOT connect this docking station to the vehicle battery until:

1. All other electrical connections are made
2. Mounting of all components is complete
3. Verification that no shorts exist in the entire system

DO NOT install equipment or route wiring or cords in the deployment path of any air bag.

When drilling into the vehicle, DO make sure that both sides of the surface are clear of anything that could be damaged.

CAUTION: *If wiring is shorted to the frame, high current conductors can cause hazardous sparks resulting in electrical fires or flying molten metal.*


After installation:

Test the docking station to ensure that it is working properly.

File these instructions in a safe place and refer to them when performing maintenance or re-installing.


WARNING: *Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.*

DELL 7030 TABLET DOCKING STATION FEATURE IDENTIFICATION

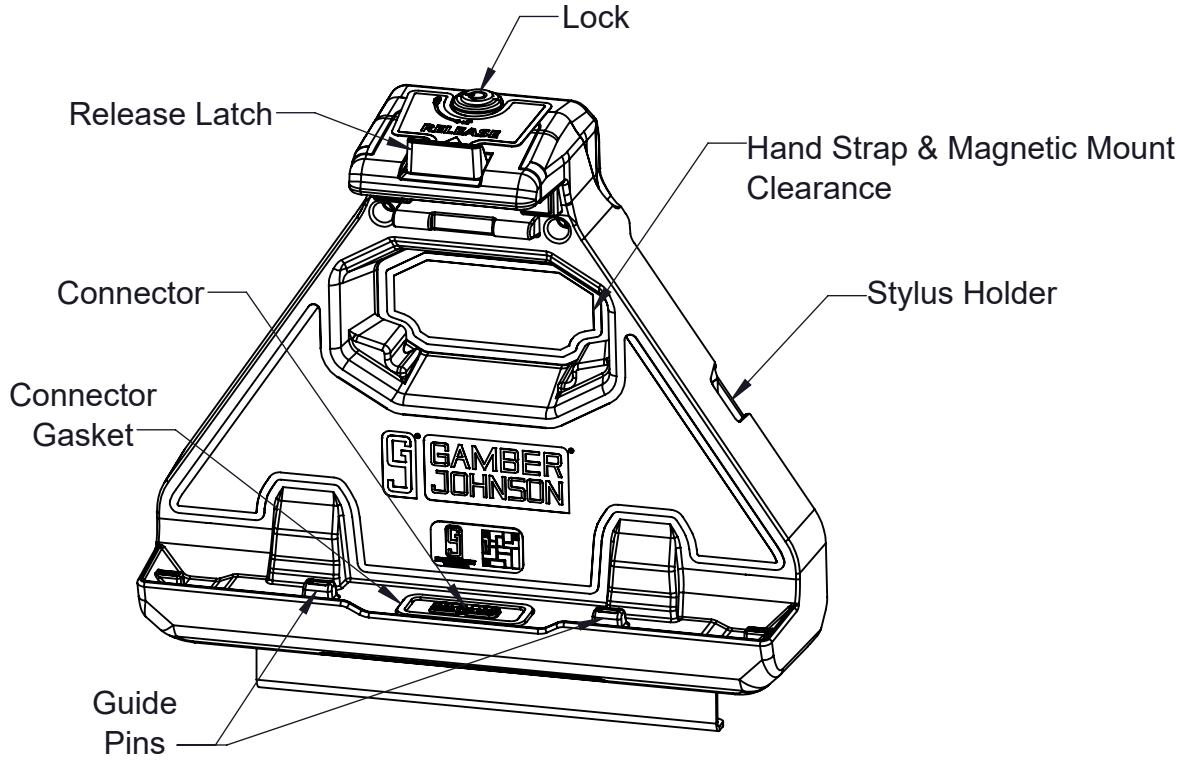

Mounting Studs
1/4-20 x 0.90"
Mounting HW Provided
Recommended Torque = 15in/lbs

Serial Label
Contains: Product Information,
MFG Date, Serial Number, Ect.

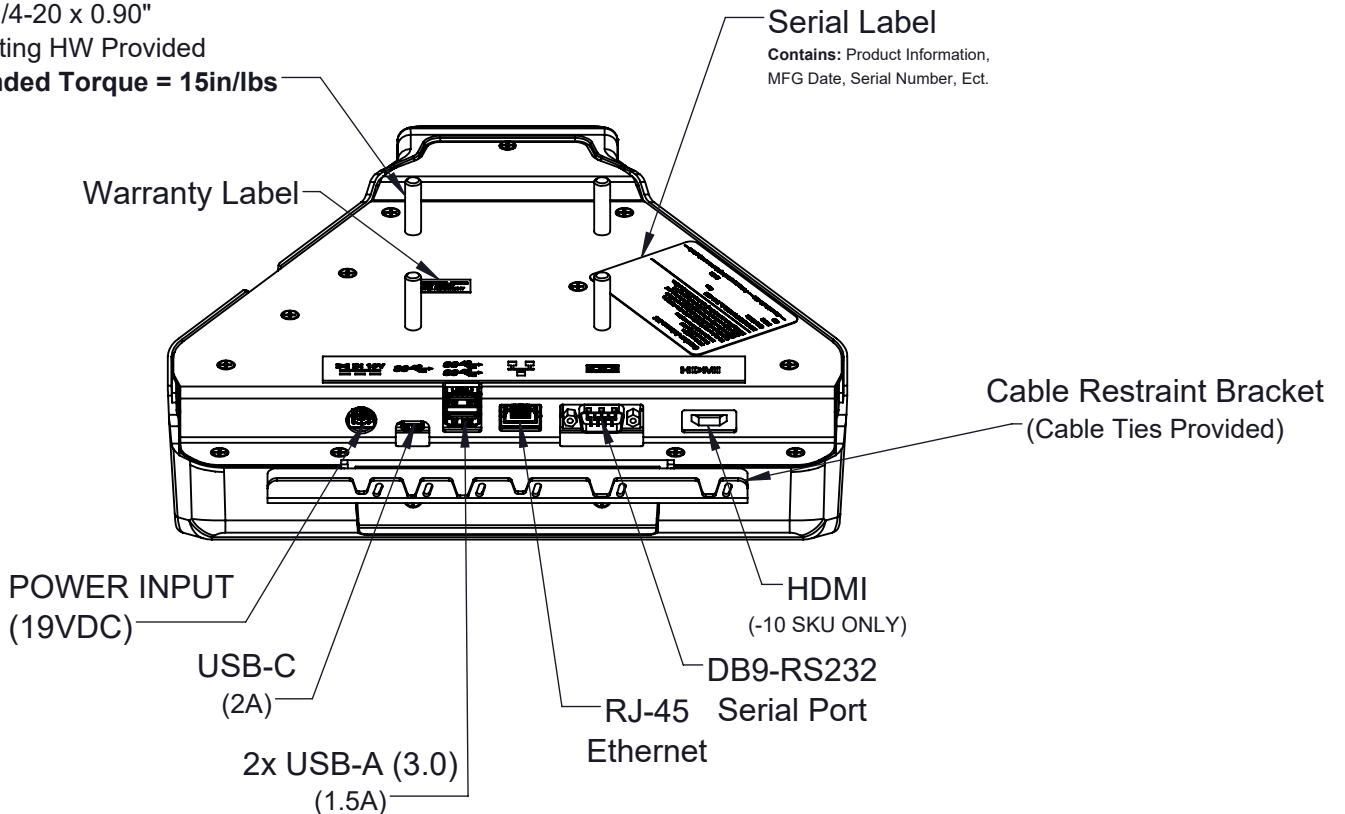

ISOLATED POWER ADAPTERS

Isolated Power Adapters can be purchased directly from Gamber Johnson or as a KIT where they are included with the docking station:

7300-0305 - 12-32v Input KIT = 7170-1054-00

7300-0306 - 20-60v Input KIT = 7170-1054-10

7300-0622 - 72-110v Input KIT = 7170-1054-20

CABLE ROUTING



Use supplied cable ties to secure all peripherals to docking station

HDMI ADAPTER DRIVER

If the 7160-1882-10 model (with HDMI) of the docking station is purchased, a driver is need in order for the Dell 7030 Tablet to detect and display the Tablet screen to an external monitor.

This driver will automatically pop up when the docking station is powered and a tablet is docked. Run the driver program labeled for windows devices and it will prompt you to restart the device. Confirm the HDMI output is functional, the screen can be extended OR duplicated depending on user preference.

If the HDMI adapter driver does NOT automatically pop up when the tablet is docked, contact Gamber Johnson for the driver and we will send it.

DOCKING AND UNDOCKING THE TABLET

TO DOCK THE TABLET

1. Insert the bottom of the tablet into the docking station.
2. Rotate the top of the tablet under the top latch until the tablet is resting inside the main housing. The latch will spring down in front of the tablet to hold it in place.
(See figures 1 & 2)
3. (Optional) Turn lock 90 degrees clockwise to lock the tablet in the dock.

Figure 1



Figure 2



Locked Position



Unlocked Position

Figure 3



TO UNDOCK THE TABLET

1. Unlock the dock if locked (turn lock 90 degrees counter-clockwise)
2. Push inward on the latch and pull outward on the top of the tablet until it clears the top latch. Make sure handle clears the lock housing.
(See Figures 3 & 4)
3. Lift the Tablet up and out of the docking station

Figure 4



Regulatory Certification Information

Regulatory Model #: 7160-1882

GJ Model #'s AND Description:

7160-1882-00 DOCK - DELL 7030 TABLET LITE PCB (No HDMI)

7160-1882-10 DOCK - DELL 7030 TABLET FULL PCB (With HDMI)

Descriptions: Dock - Dell - 7030

Certifications:

- EN 55032: 2015/A11:2020 Class B
- EN 50498: 2010
- VCCI-CISPR 32: 2016
- AS/NZS CISPR 32: 2015
- FCC Part 15 Class B
- ICES-003 Issue 7

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions. (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Gamber-Johnson LLC, 5001 Joerns Drive,
Stevens Point, WI, 54481, USA, 715-344-3482